

} μ 8 ç Ð 1 6 f & J % B  
! \* 1 \$ μ ÷ • v

@ ç, ° Ø m Æ

UBX Þ 6-\* ›, ° 1 D e 7 -

G .8 a > -C c c; ç .6•.éG®G¥ ´ 3 & Cz Ý4ú ›, "õ

+^ Õ c; 3 ‡ |=8) >¤ ç . P x ‹M6?·, pF 6!› } ÷

(, ~B—, ç . é Ð < 3 & Ý ÷ +g c; 3 ‡ |= \* p \_ Ð |= >

\_ Ð |= (9í 3 ì |=# ÂAÚA÷, )æ < ? © Á Ò ç € , A Æ

6 = |= \* , L\*


a > C- žM~ e+^ æ |= ;>û>Á ;>û Ý ÷ > ^!š • f

+U Ý, ° Õ |= ;>û Ý ÷, ç . <5 5# ÑC^H A ÷ Â d D C x , LÒ


Ø m y- >

Â = æ ;>û>Á/p E 4

´ 6 μ . \* ;>û>Á/p E 4

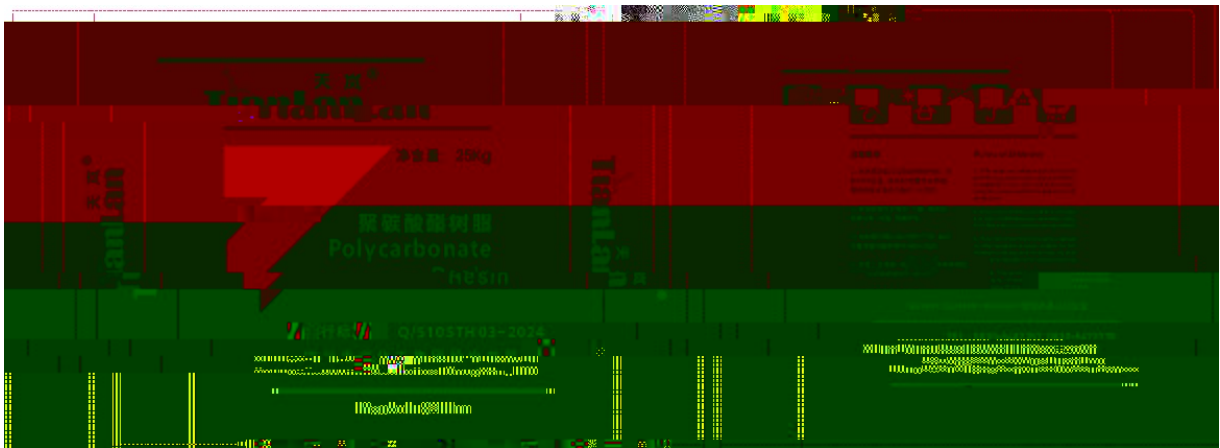

´ Â μ . \* ] ;>û>Á/p E 4

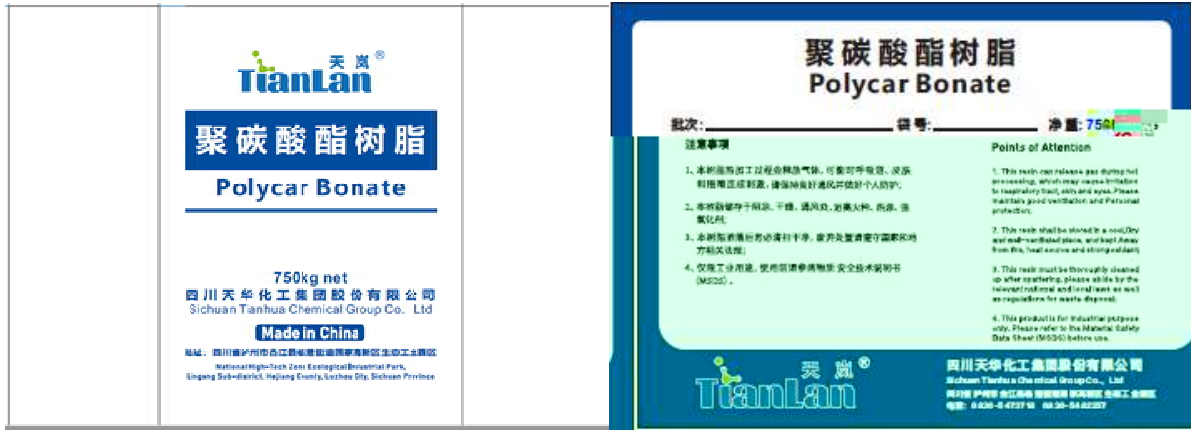

? = (, - <sup>3</sup> C?ú O

´ 6 μ 6•.éG®G¥ G78 Ý ÷ .7


|            |          |        |           |
|------------|----------|--------|-----------|
| Ý ÷ <2±    | Ý ÷ 4Ý a | Ý ÷ .7 | =#        |
| ¥(,        |          | 7      | p   •M, > |
| FP+^4Ý!™(, | αFP4Ý    | 7      |           |
|            | cQ 1%4Ý  | 7      |           |
|            | Q 1%4Ý   | 7      |           |
| I+^ İ      |          | 7 6    |           |

´ Â μ (, - <sup>3</sup> C?ú O

3 &Ý ÷(, - <sup>3</sup> C?ú O p AE Ý ÷ 2± a · FP+^5L.7 , , A 4 v/p AE

产品类别

通用编码

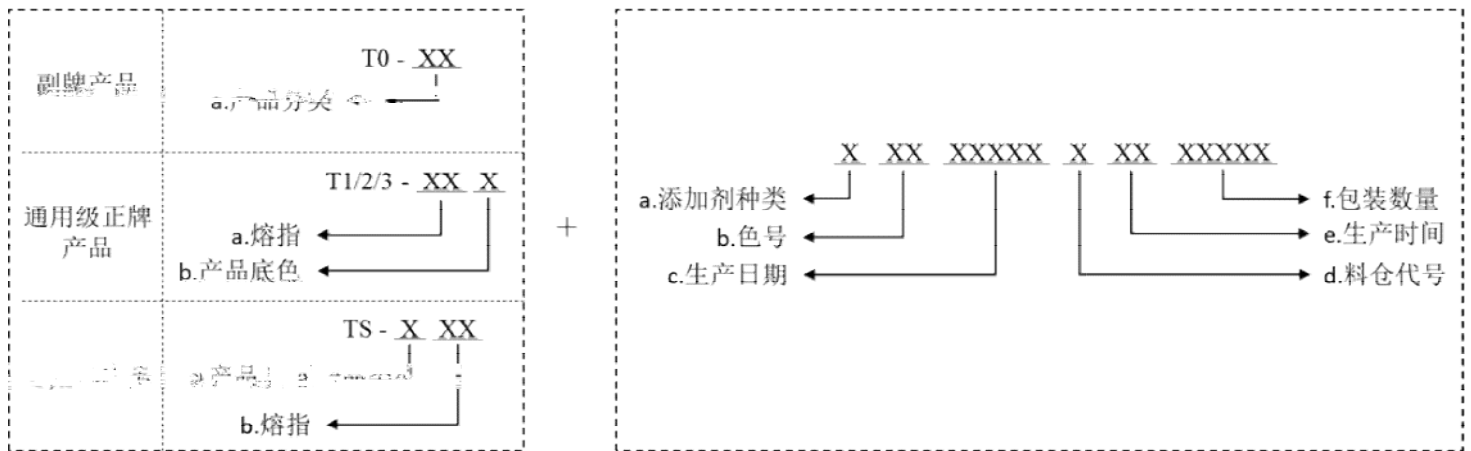

38 Ý ÷(, - <sup>3</sup> C?ú O/p E 4

B\* D Æ

FP+^5L.7

D \$1 Ö x0 2± ] I'9' ½ •" >ž/p ,5 >ž/p Æ\$1 Ö7g W x ,  
8 5 >ž/p Æ Í3a L4õ \$1 Ö7g W x , \$1 Ö x O C = 0 >

E 8" - !• >ž/p >

F +U Ý U a > >ž/p , ¬ c Æ a !• =>

!• = !• >ž/p , Æ >ž/p

a > >

G I - ] I'9' ½ •" >ž/p >

H +U Ý ,L\* ? E , l >

I ;>û !H 6 Ax l >

¥(, Ý ÷

D Ý ÷ <2± ¥(, Ý ÷ <2± , !• >ž/p >

/p Á Æ 7 5 ' >ž/p a >

&i ;>û ' »\$1 Ö7g W x,° ¥(, Ý ÷ , Ý ÷ 8" - p , ;>û

!H p1b ; >

FP+^4Ý!™(, Ý ÷

D 'Ê = 'Ê=Ã = l >

E Ý ÷ Æ8" !• >ž/p,³ Æ Ç !• >ž/p; Æ >

/p Á Æ 7 5 ' >ž/p Æ a >

&i ;>û ' »\$1 Ö7g W x,° 'Ê = cQ 1%!™(; Æ Ý ÷ , Ý ÷ 8"

- p , ;>û !H p1b ; >

l+^ I Ý ÷

D Ý ÷ 2± Á f ] I'9' ½ •" >ž/p , : Æ"j ¬ I , ) Æ

;°7Ò I , \$ Æ E œ & ¥ I , / Æ K' ( } I , ) 5 Æ L q' ù I , / \* Æ 2 • I , ( & Æ 2

电料，HH：高硬度料。

b. 熔指——熔融指数。

示例：“TS-F10 51 50101 D 08 00001”表示“2025年01月01日8点包装D仓内10熔指的薄膜料产品。产号七”

注

—

||

※

